



Air Conditioning
a member of **DAIKIN** group



FOOTPRINT

	7.5 Tons / 10 Tons / 12.5 Tons	
	cm	in
Lenght	101.6	40"
Width	86.3	34"
Height	119.4	47"



Clim Water **Series**


Standard **Configuration**

- Available in cooling only
- Base capacities of 7.5, 10 and 12.5 Tons
- Modular tandem configuration up to 62.5 Tons
- Inverter or fixed scroll compressor ((Mother module)
- Voltage 460 / 3 / 60
- 7" color touch screen control panel (Mother module)
- Flow balancing valve
- Ball valve (Son module)
- Sonic flow sensor
- MODBUS language
- Integrated connection to TCP/IP networks (Local area network and Internet)*.
- R-410A refrigerant
- ISO-9227 powder coating (1,500 hour salt spray test)
- AHRI Certification
- Meets ASHRAE 90.1
- ETL Certification
- Equipment eligible for LEED projects
- Victaulic connection

*Requires connection node


Additional **Configuration**

- Voltage 208-230 / 3 / 60

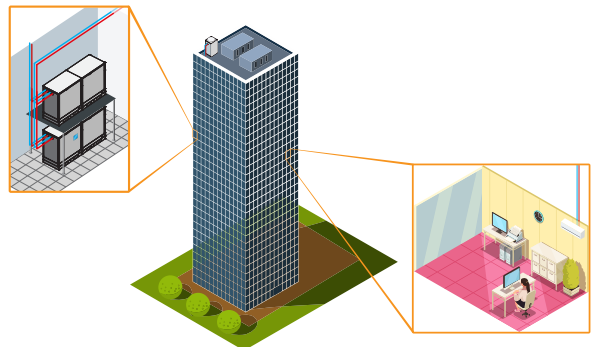

Installation and Uses Clim Water

	MOTHER UNITS			SON UNITS			TANDEM
	CLIM 7.5 Tons	CLIM 10 Tons	CLIM 12.5 Tons	CLIM 7.5 Tons	CLIM 10 Tons	CLIM 12.5 Tons	
7.5 Tons CLIM-LC-090							
10 Tons CLIM-LC-120							
12.5 Tons CLIM-LC-150							
15 Tons CLIM-LC-180							
17.5 Tons CLIM-LC-210							
20 Tons CLIM-LC-240							
22.5 Tons CLIM-LC-270							
25 Tons CLIM-LC-300							
27.5 Tons CLIM-LC-330							
30 Tons CLIM-LC-360							
32.5 Tons CLIM-LC-390							
35 Tons CLIM-LC-420							
37.5 Tons CLIM-LC-450							
40 Tons CLIM-LC-480							
42.5 Tons CLIM-LC-510							
45 Tons CLIM-LC-540							
47.5 Tons CLIM-LC-570							
50 Tons CLIM-LC-600							
52.5 Tons CLIM-LC-630							
55 Tons CLIM-LC-660							
57.5 Tons CLIM-LC-690							
60 Tons CLIM-LC-720							
62.5 Tons CLIM-LC-750							

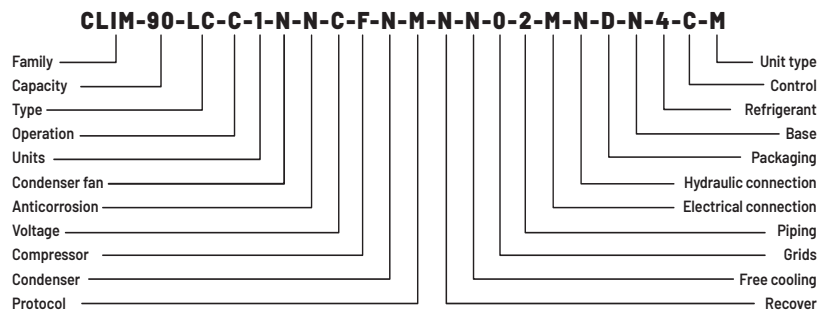

For more information about nomenclatures, please access the following website:



www.clima-flex.com/eng/clim-water-eng/