



Air Conditioning
a member of **DAIKIN** group

CliWP Series

Standard Configuration

- Wall-mounted package
- 3 and 5 Tons capacities
- R-410A refrigerant
- ISO-9227 powder coating (1,500 hour salt spray test)
- Low and high pressure switches
- Disposable air filter
- Upper Download
- Fixed compressor type
- Left or right side connection
- Voltage 208-230 / 3 / 60
- Wall thermostat control
- Evaporator fan constant, standard efficiency, centrifugal
- Condenser fan constant, standard efficiency motor, axial
- Saline protection paint cabinet 1,500 hrs.
- Grille, single deflection in injection, fixed return
- Al/Al microchannel condenser
- Cooling only operation




Additional Configuration



- Microchiller/ Modbus RTU Controller
- Free cooling with motorized actuator
- Corrosion protection on capacitor
- Voltage 460 / 3 / 60 or 220 / 1 / 60

Footprint

	3 RT		3 RT / 5 RT	
	cm	in	cm	in
Length	104.22	41 1/16"	104	40 15/16"
Width	61.23	24 1/8"	61.33	24 1/8"
Height	176.53	69 1/2"	210.97	83 1/16"

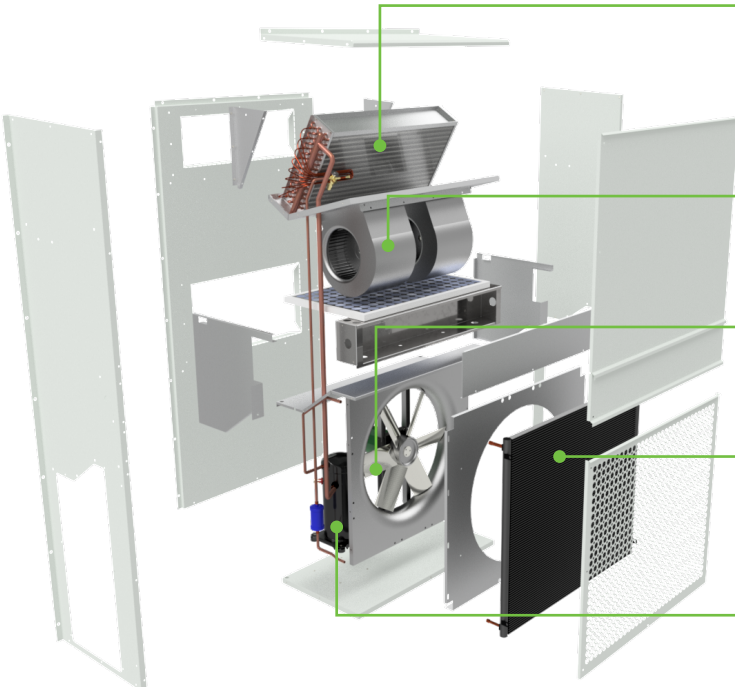


- Evaporator**
Available with Copper-Aluminum (Cu-Al) coil and Aluminum-Aluminum (Al-Al) Micro-channel, it optimizes heat exchange, resists corrosion, resists leakage and is easy to repair.
- Evaporator Fan**
Centrifugal AC fan of silent operation and high efficiency.
- Condenser Fan**
Axial fan, available in fixed AC. Operates quietly and efficiently.
- Condenser Coil**
Micro-channel Aluminum-Aluminum (Al-Al) coil, optimizes the heat exchange, resists to corrosion, resistant to leaks and of easy repair.
- Compressor**
Scroll compressors available in fixed. Increased performance and efficiency.

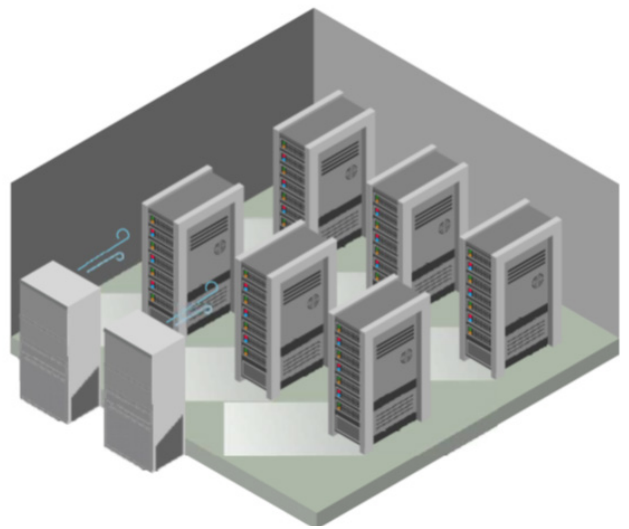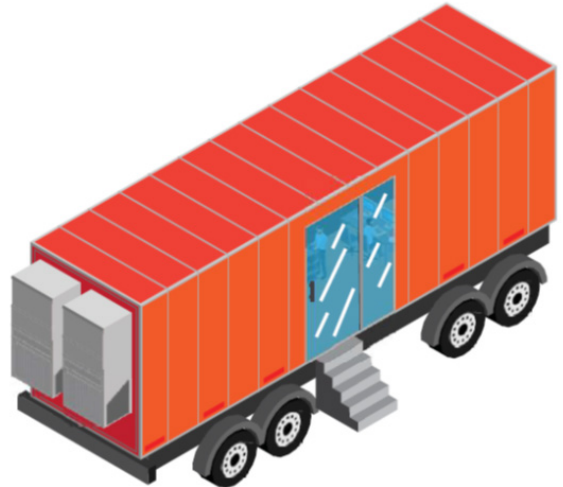

Wallpack units installed in pairs can rotate their operation according to time and setpoint.

CLIWP-36-U-F-L-C-T-C-A-P-1-N-C-D-M-1-4-0

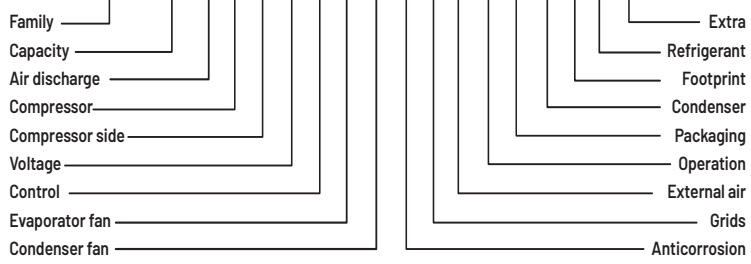

For more information about nomenclatures, please access the following website:



www.clima-flex.com/eng/cliwp-eng/