




Air Conditioning
a member of **DAIKIN** group



FOOTPRINT

	3 RT / 5 RT	
	cm	in
Width	108.6	42 ²⁵ / ₃₂ "
Depth	64.7	25 ³¹ / ₆₄ "
Height	228.6	90 ¹ / ₃₂ "



CLiWP Series

Standard Configuration


- Voltages 208-230/1/60 | 208-230/3/60 | 460/3/60
- AHRI and ETL Certified, Compliant with ASHRAE 90.1, eligible for LEED projects
- EER 11
- Fixed Scroll Compressor
- Refrigerant R410A
- Fixed Axial Condenser Fan
- Fixed Centrifugal Evaporator Fan
- Microchannel Condenser Type
- Cu/Al Evaporator Type
- Standard Control ready for 24V thermostat (not included)
- High and low pressure switches
- High and low pressure transducers
- Electronic expansion valve
- Voltage variation protections
- Overcurrent protection
- Phase failure protection
- Main breaker
- Standard Fiberglass 1" Air Filter
- Standard temperature range 61° to 115°F (0° to 46°C)
- Fresh air intake included in all models

Additional Configurations

- Electric resistance 5 and 10 kW (Nominal Capacity)
- Freecooling with motorized actuator (Economizer)
- Control for operation in low temperatures.
- Digital controller (BACNET IP, Remote monitoring)
- Salt protection on condenser
- Merv 8-1", Merv 8-2", Merv 11-2", Merv 13-2" Filters
- Wall Thermostat



Direct Expansion

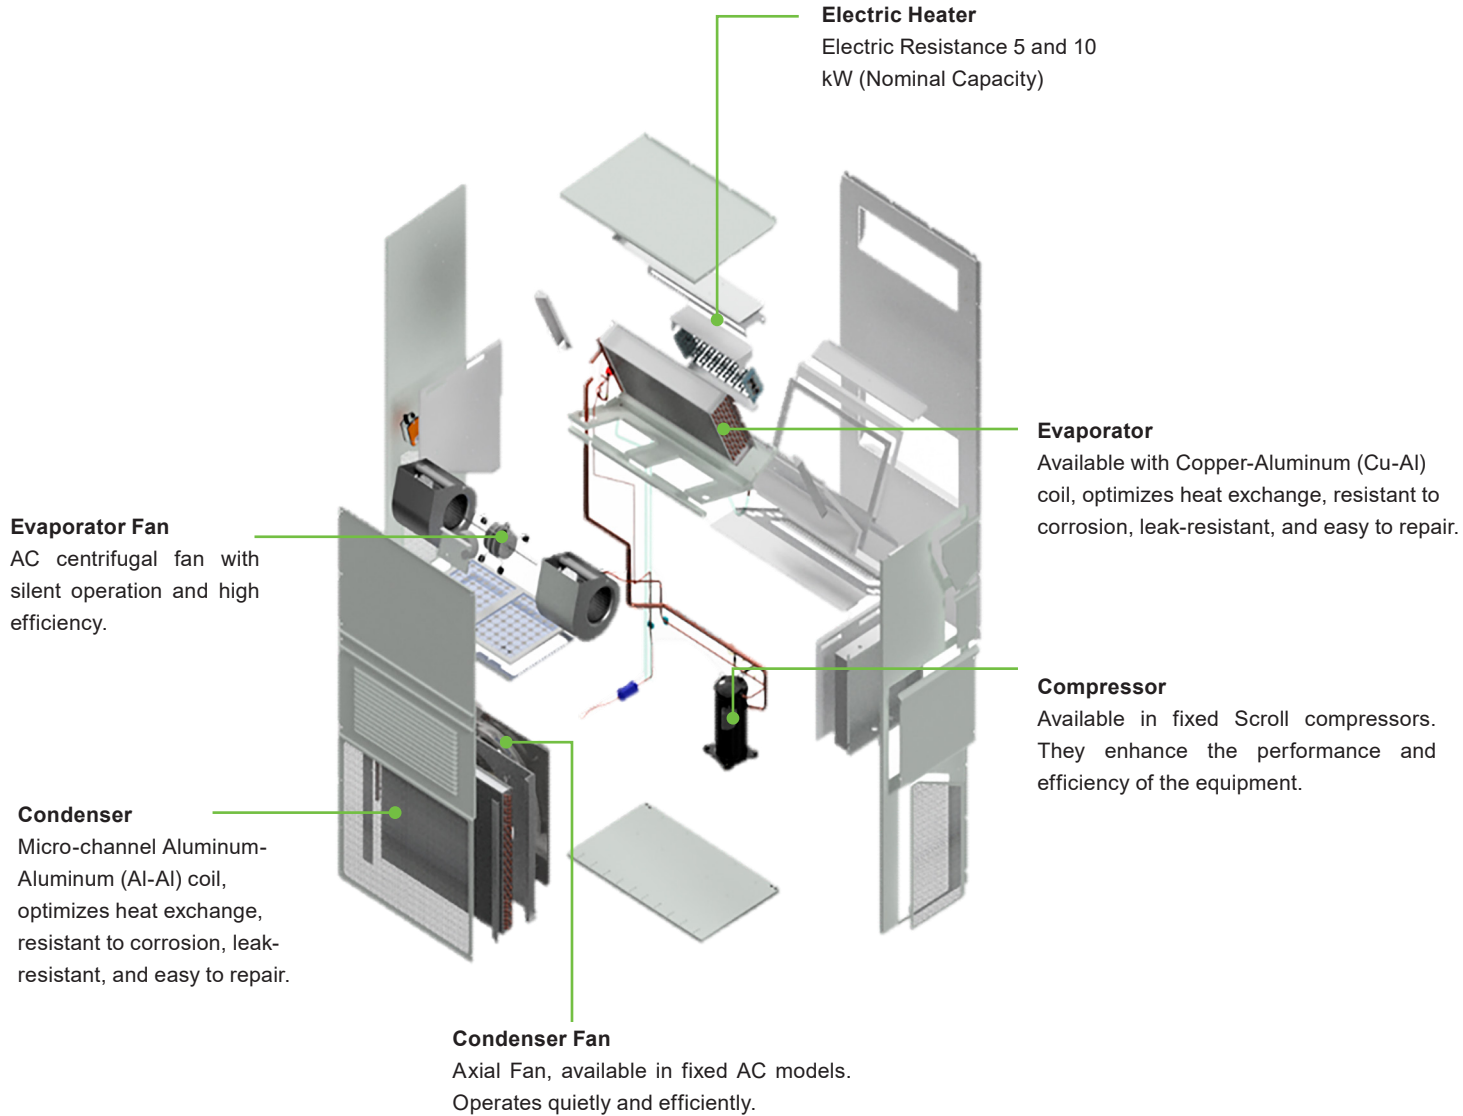

Nomenclature

